
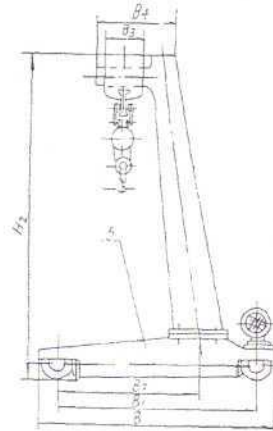


L 型电动葫芦门式起重机

L Type Electric Calabash Portal Gantry Crane

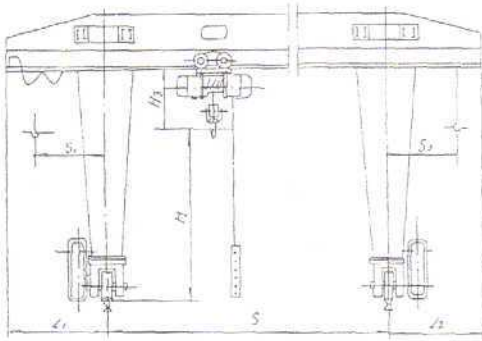


- 优点：1、设计结构简单、合理、重量轻、造价低。
 2、安装方便：底横梁与支腿高强螺栓连接，主梁套入支腿用的悬臂，电动葫芦挂到工字钢上。
 3、操作方便、安全可靠，地槽、吊钩、快慢随意控制，覆盖全部作业面。

技术规格 Technical Specification

额定起重量	跨度	最大起升高度	中级工作制度 (JC=25%)					主要部分尺寸							极限尺寸		整机自重	常用大车轨道型号			
			速度		电动机			左右悬臂伸出长度	轨面至主梁顶面距离	钩子至主梁底面距离	轮中至法兰中心距离	大车轮距	地梁总长度	支腿上部宽度	主梁宽度	吊钩至轨道中心线距离					
			起升	小车运行	起升	小车运行	大车运行									L ₁			H ₂	H ₃	B ₂
T	m	m/min	型号/kW			t	mm	m							t						
5	16	6/9	8/0.8	20	20	ZDH-4/7.5	ZDY 21-4/0.8	YZR132M2-6/3.7	YZR100M2-6/5.5	0.1±0.11	Ø400	≤2/5	8.11	4.55	6	6.9	1.9	0.8	≤2/5-100	≤2/5-100	16.61
	22	6/9											11.11	6.05	7.5	8.4					19.21
	20	6/9											8.21	4.55	6	6.9					18.7
													11.21	6.05	7.5	8.4					21.3
													8.36	4.55	6	6.9					21.6
													11.36	6.05	7.5	8.4					24.2
10	16	6/9	8/0.8	20	20	ZDS1-4/13	ZDY 21-4/2×0.8	YZR100M1-6/5.5	YZR100M2-6/7.5	0.1±0.05	Ø500	≤2/5	8.55	4.55	6	6.9	1.9	0.8	≤2/5-100	≤2/5-100	19
	22	6/9											11.55	6.05	7.5	8.4					21.7
	28	6/9											8.7	4.55	6	6.9					21.6
													11.7	6.05	7.5	8.4					24.15
													8.85	4.55	6	6.9					25
													11.85	6.05	7.5	8.4					27.7

MH 型 3-16 吨电动葫芦单梁门式起重机 (箱体形状)

MH Type of 3-16-Ton Electric Calabash Single-beam Portal Crane ($S \leq 22\text{m}$)

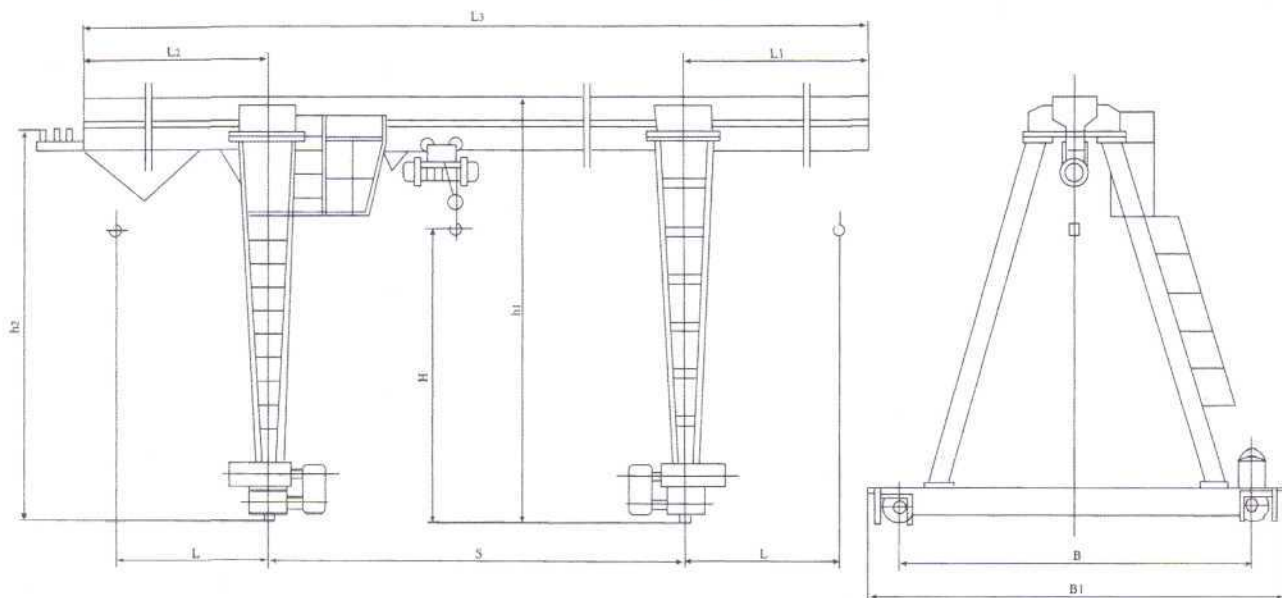

本机与 CD₁ 或 MD₁ 型电动葫芦配套使用, 适合于露天作业的固定跨间, 本机禁止吊运易燃、易爆物品, 根据用户要求还可制成单端外伸悬臂式或无悬臂式结构。

本机工作环境温度为 35℃ ~ -20℃, 电源为三相交流 50Hz, 380V。

本机外形尺寸仅供参考。

This product forms a complete set with CD₁ Type, MD₁ Type of electric calabash. It's suitable to be used in the fixed Spans in the open air. It is not suitable to lift and transport melted metals, and burnable and explosible materials. According to customer's requirement, it can be manufactured to single-end overhanging cantilever type or non-cantilever type.

The temperature of this crane's working environment is 35℃ ~ -20℃. Its power is three-phase alternating current 50Hz, 380V.

The figuration size of this crane is only for reference.